

# WD6180

## Walk Through Metal Detector



Industrial facility




Corporate security



Government security



Public transportation

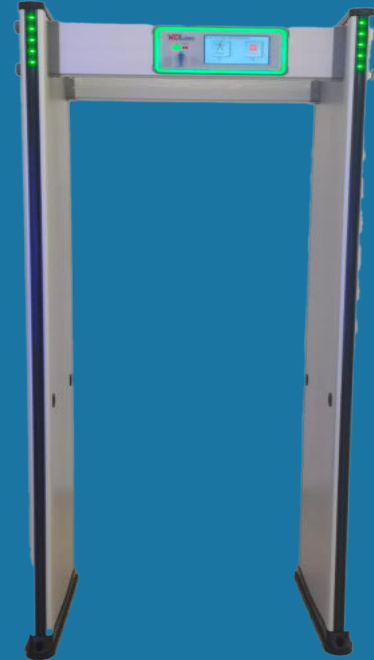

Walk Through Metal Detector is mainly used for routine security checking and epidemic prevention control. When the passengers with high temperature over preset parameters value, the detector will automatically with voice alarm. It with 18 zones shows precise metal target location on the left, center and right side of the body from head to toe.

The WD6180 Access Control Panel is designed for use by authorized personnel with specific, multi-level security with password protection, only the authorized person can operate Sound & LED alarm: Both Side LED indicator, easily show where the metal is, Automatically count passengers and alarm times.

### Pinpoint Zone Detection :

The Uniqscan' s exclusive multiple target pinpointing with 18 zones standard shows precise target location on the left, center and right side of the body from head to toe.

### Entry Pacing Lights :

Smooth, efficient traffic flow with easy-to-view, eye-level pacing lights with international "wait" and "proceed" symbols on the entrance side of each panel.

### Floor Mounting Option :

The UB600 can be mounted using the optional Adhesive Floor, Mounting Kit, which can be used to protect valuable flooring surfaces while preventing unit movement.




Harmless to human body: is harmless with heart pacemaker, pregnant women, magnetic floppy, recording tapes, etc

Input power: AC264-85V/50Hz.  
Standby power consumption: s12W, ultra-low power consumption, low radiation. Frequency: 5 bands, power on adaptive.

Anti-interference power: digital circuit design, anti-missing alarm, infrared anti-disturbance, strong resistance to external interference.

Easy assembly: designed with only 2 pieces cables and & screws, simply-to- follow instruction:

Remote control: for security gate debugging (optional function)

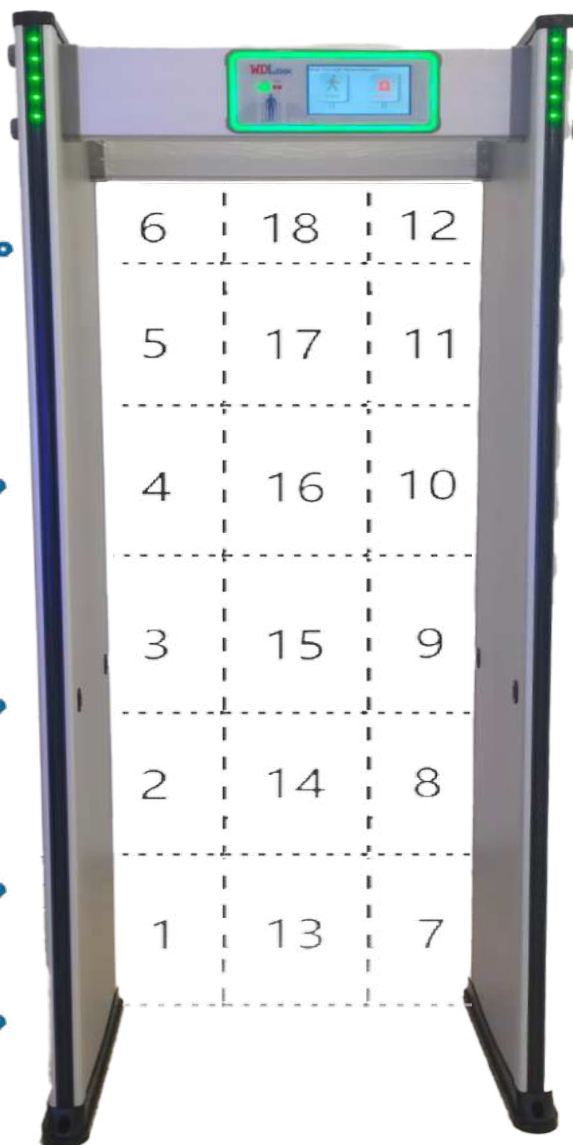

7 -inch tuch LCD color screen,  
graphic operation interface,  
IN/OUT counter  
Sound & LED alarm: Both Side LED

18 partitions to accurately determine the location of metal objects.  
Sensitivity adjustment range: total sensitivity are 1000-0 level adjustable, partition 255-0 level

Alarm function: sound and light alarm at the same time, and can record the number of alarm 99,999 times

Alarm strength indicator on control panel  
Password protection, only the authorized person can operate.  
Management encryption: Prevents data from being illegally modified or mishandled causing the product to work abnormally.

## Specifications

Power supply	AC264 - 85V/50Hz
Working Temperature	°45 ~ 20-C
Storage temperature	°60+ ~ 20-C, humidity: %95 ~ %20
Standard External size	2255mm(H) X850mm(W)X580mm(D)
Standard Internal size	1995mm(H)X700mm(W)X510mm(D)
Package size for door panels:	190*560*2280mm *1 ctn
Package size for control unit	270*390*760 mm*1ctn

