
WDU505LITE



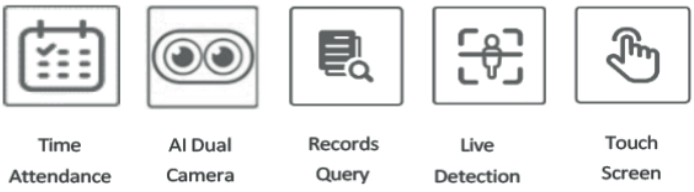

Introduction

WDU505LITE is an AI-based facial recognition all-in-one terminal, powered by the dual-core-based CPU and the latest WDLink deep-learning algorithm, which can be applied to realize a speedy recognition with unrivaled accuracy and better anti-spoofing performance. It supports 1:1 and 1:N mode, as well as 13.56MHz MIFARE.

Features

- 13.56MHz MIFARE
- Less than 1s high-speed facial verification
- Recognition accuracy 99.99% (99.77% recognition rate at 1% FAR; 99.27% recognition rate at 0.1% FAR)
- Industrial design, stable performance, smooth outline
- Live detection algorithm against color, B/W photos, videos
- QR Code access reader
- USB access
- Anti-backlight

Dimensions



Front view: 93.78±0.3 x 185.8±0.5



Side view: 22.5±0.2 / 18.0±0.2

Specifications

Capacity	
Faces	30,000
Cards	30,000
Personnel	30,000

Interfaces	
Communication Modes	TCP/IP, Wi-Fi
I/O	Relay, Wiegand output, RS232, Door sensor, Exit button, USB

Functions	
Face Recognition	Live detection
Upgrade Modes	Online, USB
SDK and Software	Standalone SDK, WDTIME, Cloud
Recognition Modes	Face, Card, Face + card, User ID + Password, Card + Password, QR Code

Hardware Specifications	
Memory	512MB RAM + 4GB ROM
CPU	Dual-core ARM Cortex-A7@900MHz, Linux
Screen	5-inch capacitive touch screen
Cameras	IR, RGB dual-lens camera, Recognition distance (0.5-1.5m)
Card Module	Standard MIFARE Card

General	
Working Temperature	-10°C ~ 50°C
Storage Temperature	-20°C ~ 60°C
Working Humidity	10% ~ 90%
IP Rate	IP42
Power Supply	DC 12V/2A
Power Consumption	Max. 15W
Device Dimensions	186 mm × 94 mm × 23 mm
Certificates	CE, FCC